


EnduroSLC™ Technology

Superior Data Retention and Endurance

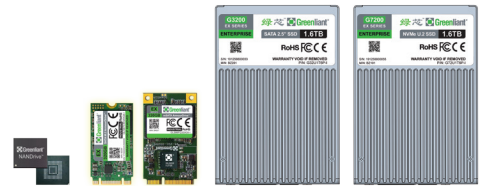


EnduroSLC™ is a proprietary 3D NAND management technology developed by Greenliant for high reliability applications requiring superior data retention and endurance in extreme temperature, high stress environments. With advanced hardware ECC capabilities and NAND flash management algorithms, EnduroSLC Technology significantly extends the write endurance of 1-bit-per-cell (SLC) SSDs reaching industry leading 400K program-erase (P/E) cycles. EnduroSLC enabled products meet robust data retention requirements under complex temperature conditions and support high cross-temperature ranges between data programming and reading. Due to its substantially lower bit error rate, an EnduroSLC SSD provides better consistency in read/write performance throughout product lifetime.

EnduroSLC™ Advantage

EnduroSLC SSDs offer a high reliability flash storage solution with ultra-robust data retention and ultra-high write endurance that exceeds capabilities of legacy, planar SLC NAND based products. Available in industry standard mSATA, M.2, 2.5", U.2 and BGA form factors, Greenliant's EX Series ArmourDrive™, NANDrive™ and Industrial Enterprise SSDs with EnduroSLC Technology support extended temperature ranges (-40°C to +85°C), and are ideal for systems operating in severe conditions, requiring high reliability data storage at a lower cost per GByte.

EnduroSLC NANDrive and ArmourDrive SSDs offer endurance options of 50K up to unparalleled endurance of 400K P/E cycles, and EnduroSLC Industrial Enterprise SSDs can reach a write endurance of 280 PetaBytes Written (PBW). Greenliant's NANDrive BGA SSDs with EnduroSLC Technology can withstand multiple passes of SMT high temperature process without losing data. System designers can take advantage of the wide range of popular form factors supported by EnduroSLC SSDs that will meet and exceed the needs of their mission critical applications.

Endurance Comparison

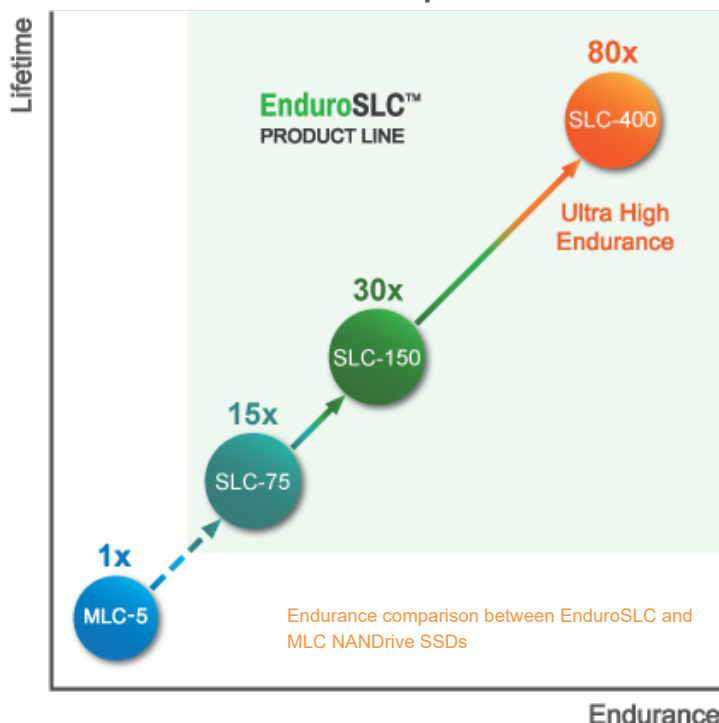


Applications

- Industrial automation
- Industrial control
- Single-board computer
- Telematics / Navigation
- Test and measurement
- Data acquisition
- Industrial gaming
- Transportation equipment
- Point-of-Sale terminal
- Wireless base station
- Router / Switch / Gateway
- Aerospace system
- Medical equipment
- Security system
- Robotics

Greenliant
 3970 Freedom Circle, Suite 100
 Santa Clara, CA 95054 USA
 Tel. 1-408-200-8000
 Fax 1-408-200-8099
www.Greenliant.com

Greenliant SSDs with EnduroSLC Technology



NANDrive™ — Small Form Factor BGA SSDs

Ideal for Write Intensive Applications and Space Constrained Designs

NANDrive	eMMC	NVMe	SATA
Part Number	GLS85VM1xxxG/Q/E	GLS85LE1xxxG/Q/E	GLS85LS1xxxG/Q/E
Interface / Endurance	eMMC 5.1 / 75 / 150 / 400K*	PCIe Gen3x4 / 75 / 150 / 400K*	SATA 6Gb/s / 50 / 100 / 250K+*
Capacity	2GB, 4GB (100-ball) 2GB, 4GB, 8GB, 16GB, 32GB, 64GB (153-ball)	20GB, 40GB, 80GB, 160GB	2GB, 4GB, 8GB, 16GB, 32GB, 64GB, 128GB
Package Type / Dimensions (mm)	100-ball LBGA / 14 x 18 x 1.40 153-ball LFBGA / 11.5 x 13 x 1.35	291-ball LFBGA / 16 x 20 x 1.40; FBGA / 16 x 20 x 1.85 (160GB)	145-ball BGA / 14 x 24 x 1.50

*Program-erase cycles: 250K, or higher, offered up to the second highest capacity listed for each product - Built to Order (BTO) / additional terms apply



ArmourDrive™ — High Reliability Removable SSDs

Industrial SSDs Optimized for Ultra High Write Endurance

ArmourDrive	mSATA	SATA M.2 2242
Part Number	GLS86FQxxxG1/8/9	GLS87CRxxxG1/8/9
Interface / Endurance	SATA 6Gb/s / 60 / 120 / 300K+**	SATA 6Gb/s / 75 / 150 / 400K**
Capacity	10GB, 20GB, 40GB, 80GB, 160GB, 320GB	
Form Factor / Dimensions (mm)	JEDEC MO-300 / 29.85 x 50.80 x 4.85	M.2 2242 SS / 22 x 42 x 2.38

**Program-erase cycles: 300K, or higher, offered up to the second highest capacity listed for each product - Built to Order (BTO) / additional terms apply




Industrial Enterprise — High Capacity SSDs

Designed for High Performance, High Reliability Systems

Industrial Enterprise	SATA 2.5"	NVMe U.2
Part Number	G32UxxxP	G72UxxxP
Interface / Endurance	SATA 6Gb/s / Unrestricted DWPD for 5 years***	PCIe Gen3x4 / 30 DWPD for 5 years***
Capacity	800GB, 960GB, 1.6TB, 1.92TB	
Form Factor / Dimensions (mm)	2.5-inch / 100.5 x 68.5 x 9.5	

***Drive Writes Per Day (DWPD)

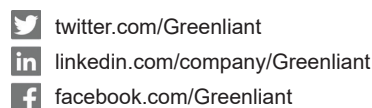

twitter.com/Greenliant

linkedin.com/company/Greenliant

facebook.com/Greenliant

NANDrive FAQs: www.greenliant.com/nandrive-faqs

ArmourDrive FAQs: www.greenliant.com/armourdrive-faqs

Long-Term Availability: www.greenliant.com/support/#LTA-program

For more information, contact your Greenliant representative: www.greenliant.com/sales



© 2024 Greenliant

These specifications are subject to change without notice. 04/2024

Greenliant, the Greenliant logo, EnduroSLC, ArmourDrive and NANDrive are registered trademarks or trademarks of Greenliant.