



# SD / microSD ArmourDrive™

93 Series

Product Brief

## Product Description

The SD / microSD ArmourDrive™ family consists of high-reliability, industrial flash memory cards in a wide selection of capacities and endurance specifications. To better address customer needs, the 93 Series is available with 1-bit-per-cell (SLC) or 3-bit-per-cell (TLC) 3D NAND configurations. Operating at extreme temperatures, SD and microSD ArmourDrive memory cards are ideal for applications requiring removable data storage able to withstand demanding environments.

The 93 Series implements advanced NAND flash management technology to preserve data integrity and extend memory card lifespan. Built in the standard SD and microSD card form factors, and backed by Greenliant's technical support, SD and microSD ArmourDrive memory cards give industrial, medical, gaming, video and imaging customers added flexibility when selecting reliable, hot-swappable solid state storage for space-constrained, embedded systems.



## Key Features

### SD / microSD Form Factor and Interface

- SD (32 x 24 x 2.1 mm) and microSD (15 x 11 x 1.0 mm)
- Compliant with SD Specification Version 6.10
- Supports SD and SPI protocols

### High Performance

- Sequential Read / Write performance up to 95MB/s / 85MB/s
- Bus speed mode up to UHS-I 104
- Class 10 Speed performance rating

### Energy Efficient

- 3.3V low power supply
- Active Mode less than 405mA
- Standby Mode less than 1mA

### Advanced Flash Management

- Dynamic and static wear leveling algorithms maximize product lifespan
- Replaces bad blocks with spare blocks in the NAND flash to prevent uncorrectable errors

### Built-in ECC

- Uses advanced bit error detection and correction optimized for 3D NAND

### SSD Lifespan Monitoring

- Supports SMART command-based alerts indicating the remaining useful product life

### Rugged

- Shock (1500G) and vibration (20G) resistant
- Waterproof (water depth up to 1000mm)

### High Reliability

- MTBF more than 3,000,000 hours

### Data Security

- CPRM support (optional)
- Password protection (optional)

### Power Interrupt Data Protection

- Helps prevent data corruption during unexpected power failure events

### Wide Range of Capacities

- EX Series (SLC, 3D NAND): 8 GB - 64 GB
- PX Series (TLC, 3D NAND): 32 GB - 256 GB

### Industrial Temperature Range

- Operating temperature: -40°C to +85°C




## Applications

- Transportation
- Vending
- Agriculture
- Industrial PC
- Navigation
- Infotainment
- Aviation
- Point-of-sales
- Security / Surveillance
- Industrial automation & control
- Data logger
- Healthcare
- Test & measurement
- Networking
- Handheld scanner
- Professional video / photo


**Greenliant Systems**  
 3970 Freedom Circle, Suite 100  
 Santa Clara, CA 95054 USA  
 Tel: 1-408-200-8000  
 Fax: 1-408-200-8099  
[www.Greenliant.com](http://www.Greenliant.com)

## SD / microSD ArmourDrive Board Diagrams

SD  
32mm x 24mm x 2.1mm  
Pb-free (RoHS compliant)

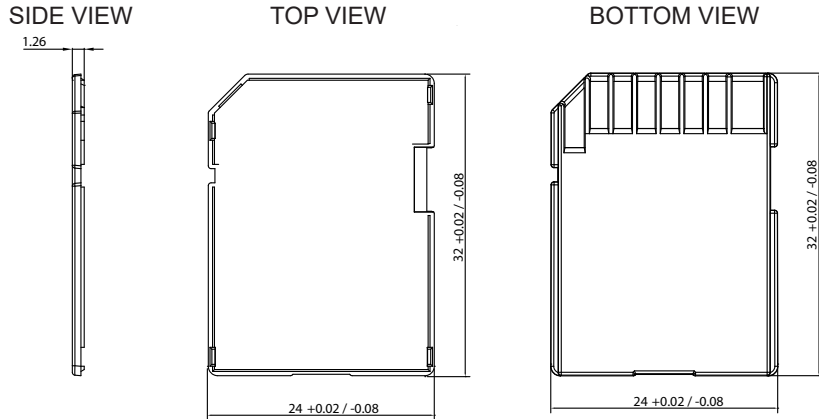


microSD  
15mm x 11mm x 1.0 mm  
Pb-free (RoHS compliant)

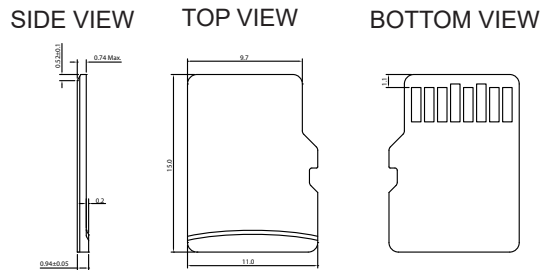




Note: All dimensions are in millimeters, unless otherwise specified.
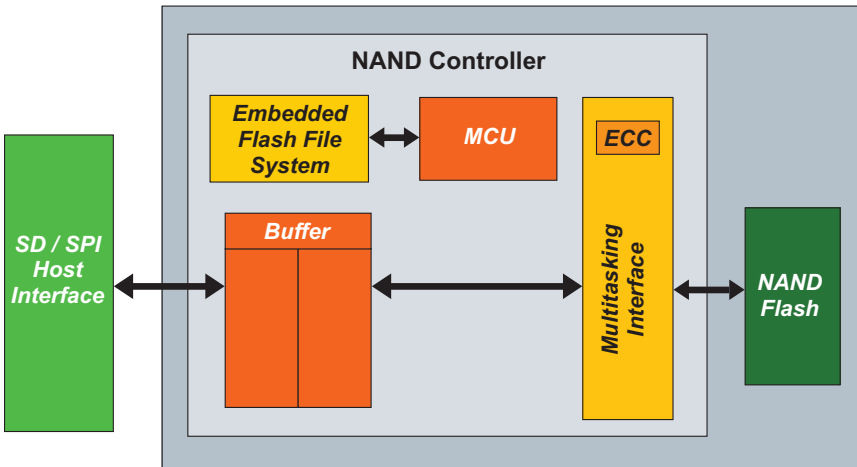
## SD / microSD ArmourDrive Block Diagram



## Product Lineup

93 Series SD / microSD ArmourDrive		
Product Series / Capacity	NAND Configuration / Endurance	Temperature Range
<b>EX</b> 8 GB - 64 GB	1 bit per cell (3D SLC NAND) / 30K P/E cycles	Industrial -40°C to +85°C
<b>PX</b> 32 GB - 256 GB	3 bits per cell (3D TLC NAND) / 3K P/E cycles	

 [twitter.com/Greenliant](https://twitter.com/Greenliant)  
 [linkedin.com/company/Greenliant-Systems](https://linkedin.com/company/Greenliant-Systems)  
 [facebook.com/Greenliant](https://facebook.com/Greenliant)

**ArmourDrive FAQs:** [www.greenliant.com/armourdrive-faqs](http://www.greenliant.com/armourdrive-faqs)

For more information, contact your Greenliant representative: [www.greenliant.com/sales](http://www.greenliant.com/sales)



© 2019 Greenliant  
Greenliant, the Greenliant logo and ArmourDrive are trademarks of Greenliant.  
These specifications are subject to change without notice. 10/2019